

- IEC 62053-22 Class 0.2S
- IEC 61000-4-30 Class S Compliance
- Dip/Swell/Interruption/Transient Detection
- WF Recording @ 256 samples/cycle
- Built-in non-volatile 1GB Memory
- Energy Log, PQ Log, SOE Log
- Configurable Data Recording Log
- Metal Enclosure with No Openings
- IP54 Rated
- Extended Warranty
- ANSI C12.20 Class 0.2
- True RMS Measurements
- Large Color Dot-Matrix IPS Display with Wide Viewing Angle
- I4 and Residual Current Monitoring
- Extensive I/O Capabilities
- Multi-Tariff TOU
- Setpoint Alarms
- Industrial Grade Components
- Standard Tropicalization
- Extended Temperature Range

*Designed For Reliability*


*Manufactured To Last*



**CET**  
Electric  
Technology

**iMeter 6**

## Advanced Power Quality Monitor

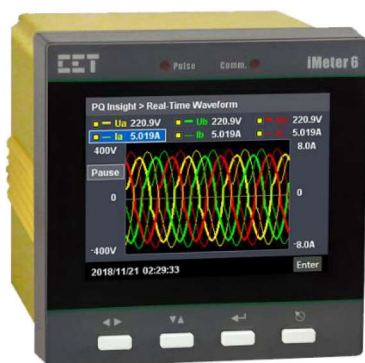

The iMeter 6 is CET's latest offer for the advanced Power Quality Monitoring of Incomers and Critical Feeders for Utilities, Data Centers, High-Tech Manufacturing Facilities and Heavy Industries. Housed in an industry-standard DIN form factor measuring 96mmx96mmx119.5mm, the iMeter 6's compact size is perfectly suited for today's space restricting environment. The iMeter 6 features quality construction with metal enclosure, advanced Power Quality and Revenue-Accurate measurements, high-resolution Waveform Recording capabilities, comprehensive Data Logging with 1GB memory, extensive I/O and a user friendly, IPS Color Dot-Matrix Display @ 320x240. It also provides either an I4 Input for Neutral Current measurement or a 0/4-20mA Analog Input for measuring external transducer signal such as Residual or Leakage Current. With a standard 100BaseT Ethernet Port and a RS-485 port with Modbus TCP/RTU support, the iMeter 6 becomes a vital component of an intelligent Power Quality Monitoring System.

### Typical Applications

- Class 0.2S Revenue Metering
- Power Quality Monitoring of Main Incomer or Critical Feeder
- Utility, Industrial and Commercial Metering
- Substation, Building and Factory Automation
- Low, Medium and High Voltage applications
- Neutral (I4) and Residual Current (Ir) Monitoring

### Features Summary

#### Ease of use

- Large, backlit, Color Dot-Matrix IPS display with wide viewing angle
- Password protected setup via front panel, on-board Web Server or free PMC Setup software
- Easy installation with mounting slide bar, no tools required

#### Basic Measurements (1 second update)

- 3-Phase Voltage, Neutral-Earth Voltage, Current and Power measurements
- Neutral current (I4), Calculated Residual Current (Ir) and Frequency
- kWh, kvarh Import / Export / Net / Total and kVAh Total
- kvarh Q1-Q4
- Interval Energy
- Voltage and Current Phase Angles
- Device Operating Time (Running Hours)
- DI Pulse Counters
- Optional AI measurement

#### High-speed Measurements

- 3-Phase Voltage @ 1 cycle
- 3-Phase Current and Neutral Current (I4) @ 1 cycle
- 3-Phase Power and Power Factor @ 1 cycle

#### Power Quality

- IEC 61000-4-30 Class S Compliance
- Waveform Recording at 256 samples per cycle
- Fundamental measurements for 3-Phase Voltage, Current, Power, PF and I4
- Voltage and Current Unbalance and Symmetrical Components
- Voltage and Frequency Deviation
- THD, TOHD, TEHD, Crest-Factor, K-Factor and TDD
- Individual harmonics up to 63<sup>rd</sup>
- Dip/Swell/Interruption Detection and Transient Capture

#### Demands

- Present and Predicted Demands for 3-Phase Voltage, Current, Power, PF, I4, Frequency, U and I Unbalance and THD
- Peak Demands with Timestamp for Current per phase and average as well as Power of This Month and Last Month (or Since Last Reset and Before Last Reset)
- Max/Min values per demand interval
- Demand synchronization with DI

#### Setpoints

- 16 standard setpoints with extensive list of monitoring parameters including Voltage, Current, Power, Current and Power Demand, Unbalance, Sequence Components, THD, Phase Loss and Phase Reversal ... etc.
- 8 high-speed setpoints for Voltage, Current, Power, PF, Freq. Dev. and DI
- Configurable thresholds and time delays
- 6 Logical Modules supporting AND/OR/NAND/NOR operations
- SOE, WFR, Data Recorder, DO and Email Alarm trigger

#### Multi-Tariff TOU capability

- Two independent sets of TOU Schedules
  - Up to 12 Seasons
  - 90 Holidays or Alternate Days
  - 20 Daily Profiles, each with 12 Periods at min. 15-min interval
  - 8 Tariffs, each providing kWh/kvarh Import/Export and kVAh
- Switching between two TOU schedules according to pre-programmed time and logged as an SOE event

#### Log memory

- 1GB on-board memory
- DR Logs, WFR Logs, Energy Logs and Demand Logs

#### Waveform Recorder (WFR) Log

- 2 independent groups of WFR with a combined total of 256 entries
- Simultaneous capture of 3-Phase Voltage and Current signals
- Scheduled WFR with programmable schedule and repetition times
- Programmable formats and pre-fault cycles from 256x20 to 16x320
- Support FIFO Recording Mode

#### Energy Log

- Interval recording of kWh/kvarh Import/Export and kVAh Total in programmable recording interval from 1 min to 65535 mins
- Support FIFO or Stop-When-Full Recording Mode

#### Data Recorder (DR) Log

- 12 Standard DR Logs and 4 High-Speed DR Logs
- Recording Interval from 1s to 40 days for Standard DR Log and 1 to 60 cycles for High-Speed DR Log
- Up to 16 Programmable Parameters for each DR Log with programmable sources which include almost all Real-Time measurements, Harmonics, Unbalance, Demand and Accumulative Energy measurements
- Configurable Depth and Recording Offset
- Support FIFO or Stop-When-Full Recording Mode

#### SOE Log

- 512 events time-stamped to  $\pm 1$ ms resolution
- Setup changes, Setpoint events and I/O operations

#### PQ Log

- 512 entries time-stamped to  $\pm 1$ ms resolution
- Dip/Swell/Interruption and Transient detection

#### Max/Min Log

- Logging of Max/Min values for measurements such as Voltage, Current, Frequency, P, Q, S, PF, Unbalance, K-factor and THD with Timestamp for This Month and Last Month (or Since Last Reset or Before Last Reset)

#### Digital Inputs

- 6 channels, volts free dry contact, 24VDC internally wetted
- 1000Hz sampling for status monitoring with programmable debounce
- Pulse counting with programmable weight for each channel for collecting WAGES (Water, Air, Gas, Electricity, Steam) information
- Demand Synchronization
- Tariff switching based on DI status

**Designed For Reliability**

**Manufactured To Last**



### Digital Outputs

- Up to 3 channels Form A Mechanical Relays for alarming and control

### Analog Input (Optional)

- 0/4-20mA DC input with programmable zero and full scales
- Can be used to measure external transducer signal such as Residual or Leakage Current

### Communications

#### RS-485 (P1)

- Optically isolated RS485 ports
- Baud rate from 1200 to 38,400bps
- Modbus RTU, Ethernet Gateway, Modbus Master

#### Ethernet (P2)

- 10/100BaseT Ethernet Port with RJ45 connector
- Built-in Web Server for easy data viewing and setup configuration
- Modbus TCP, HTTP, SMTP, SNMP, FTP


### Real-time clock

- Battery-backed Real-Time Clock with 6ppm accuracy (<0.5s per day)

### System Integration

- Supported by CET's PecStar® iEMS
- Easy integration into other Automation or SCADA systems via Modbus RTU and Modbus TCP protocols
- The on-board password protected Web Server provides user-friendly access to its data and supports the configuration for most of the Setup parameters via a standard web browser

### Device View and Dimensions

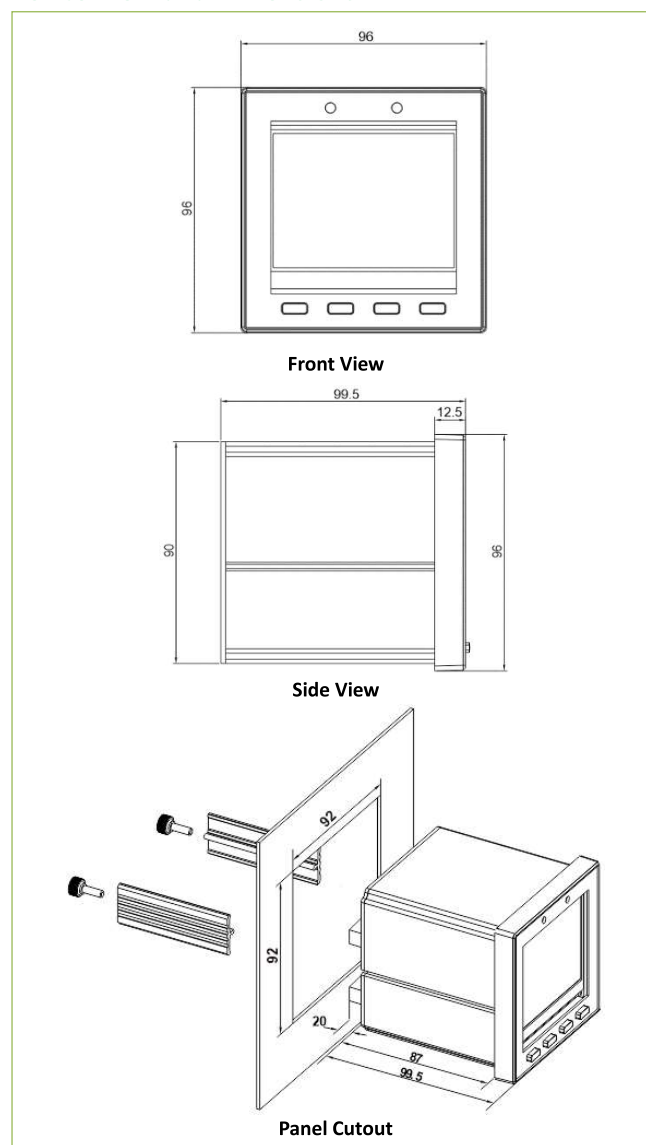

### Accuracy

Parameters	Accuracy	Resolution
Voltage	±0.1%	0.01V
Current	±0.1%	0.001A
I4 Measured	±0.1%	0.001A
kW, kvar, kVA	±0.2%	0.001k
kWh, kVAh	IEC 62053-22 Class 0.2S ANSI C12.20 Class 0.2	0.1kWh
kvarh	IEC 62053-24 Class 0.5S	0.1kvarh
P.F.	±0.2%	0.001
Frequency	±0.01 Hz	0.01Hz
Harmonics	IEC 61000-4-7 Class A	0.01%
K-Factor	IEC 61000-4-7 Class A	0.01
Phase Angles	±1°	0.1°
AI	±0.5%	-

### Technical Specifications

Voltage Inputs (V1, V2, V3, VN)	
Standard (Un)	240VLN/415VLL
Optional (Un)	69VLN/120VLL, 400VLN/690VLL
Range	10% to 120% Un
PT Ratio	1-10,000
Overload	1.2xUn continuous, 2xUn for 10s
Burden	<0.5VA @ 240V
Frequency	45-65Hz
Current Inputs (I11, I12, I21, I22, I31, I32, I41, I42)	
Standard (In / Imax)	5A / 10A
Optional (In / Imax)	1A / 2A
Range	0.1% to 200% In
CT Ratio (I1-I3)	1-6,000 (5A) or 1-30,000 (1A)
I4 Ratio	1-10,000
Overload	2xIn continuous, 20xIn for 1s
Burden	<0.25VA @ 5A
Power Supply (L+, N-)	
Standard	95-277VAC L-N/415VAC L-L, 45-65Hz
Burden	90-300VDC <10VA/6W @ 240V
Digital Inputs (DI1, DI2, DI3, DI4, DI5, DI6, DIC)	
Type	Dry contact, 24VDC internally wetted
Sampling	1000Hz
Hysteresis	1-1,000ms programmable
Digital Outputs (DO11, DO12, DO21, DO22, DO31, DO32)	
Type	Form A Mechanical Relay
Loading	5A @ 250VAC/30VDC
LED Pulse Outputs (kWh, kvarh)	
Type	Optical
Pulse Constant	1000/3200/5000/6400/12800 imp/kWh
Analog Input (AI+, AI-)	
Type	0-20 / 4-20 mA
Overload	24 mA maximum
Environmental Conditions	
Operating Temp.	-25°C to 70°C
Storage Temp.	-40°C to 85°C
Humidity	5% to 95% non-condensing
Atmospheric Pressure	70 kPa to 106 kPa
Altitude	< 2000m
Pollution Degree	2
Measurement Category	CAT III
Mechanical Characteristics	
Enclosure	Aluminum Alloy
Panel Cutout	92x92 mm
Unit Dimensions	96x96x119.5 mm
Shipping Dimensions	TBD
IP Rating	54
Shipping Weight	TBD



**CET**  
Electric  
Technology

# iMeter 6 Advanced Power Quality Monitor

## Standards of Compliance

Safety Requirements	
CE LVD Directive 2014 / 35 / EU	EN61010-1: 2010 EN61010-2-030: 2010
Electrical safety in low voltage distribution systems up to 1000Vac and 1500 Vdc	IEC 61557-12: 2018 (PMD)
Insulation	IEC 62052-11: 2003 IEC 62053-22: 2003
AC Voltage: 2kV @ 1 minute Insulation resistance: >100MΩ Impulse Voltage: 6kV, 1.2/50μs	
Electromagnetic Compatibility CE EMC Directive 2014 / 30 / EU (EN 61326: 2013)	
Immunity Tests	
Electrostatic Discharge	EN 61000-4-2: 2009
Radiated Fields	EN 61000-4-3: 2006+A1: 2008+A2: 2010
Fast Transients	EN 61000-4-4: 2012
Surges	EN 61000-4-5: 2014+A1: 2017
Conducted Disturbances	EN 61000-4-6: 2014
Magnetic Fields	EN 61000-4-8: 2010
Voltage Dips and Interruptions	EN 61000-4-11:2004+A1: 2017
Emission Tests	
Limits and methods of measurement of electromagnetic disturbance characteristics of industrial, scientific and medical (ISM) radio-frequency equipment	EN 55011: 2016
Electromagnetic compatibility of multimedia equipment - Emission requirements	EN 55032: 2015
Limits for harmonic current emissions for equipment with rated current ≤16 A	EN 61000-3-2: 2014
Limitation of voltage fluctuations and flicker in low-voltage supply systems for equipment with rated current ≤16 A	EN 61000-3-3: 2013
Emission standard for residential, commercial and light-industrial environments	EN 61000-6-4: 2007+A1: 2011
Mechanical Tests	
Spring Hammer Test	IEC 62052-11: 2003
Vibration Test	IEC 62052-11: 2003
Shock Test	IEC 62052-11: 2003

## Ordering Guide

Product Code		Description
iMeter 6 Advanced Power Quality Monitor		
Basic Function		256 samples per cycle, Class 0.25 Compliant, 3-Phase Metering, Demands, Peak Demands, Max/Min, SOE Log, Individual Harmonics to 63rd, 1GB Log Memory, 16 Data Recorders, High-Speed Data Recording, WF Recording, Sag/Swell/Interruption and Transient Detections
Display Screen		Color Dot-Matrix IPS Display (320x240 Resolution)
B	Input Current (I1, I2, I3, I4*)	
5		5A
1		1A
Input Voltage (V1, V2, V3)		
1		69V/120V
3		240V/415V
9*		400V/690V
Power Supply		
2		95-277VAC L-N/415VAC L-L, 45-65Hz 90-300VDC
System Frequency		
5		45Hz-65Hz
DI/DO		
A		6DI + 3DO
AI		
X		No
A*		1xAnalog Input (0-20mA or 4-20mA DC)*
Communications		
D		1x10/100BaseT Ethernet port + 1xRS-485 port
Display Language		
E		English
iMeter 6 - B 5 3 2 5 A X D E		iMeter 6-B5325AXDE (Standard Model)

\* Additional charges apply

\* The I4 input is replaced by the AI Option A

## Your Local Representative



Address: Units A-D, 15/F., Goodman Kwai Chung Logistics Centre,  
585-609 Castle Peak Road, Kwai Chung, Hong Kong  
Tel.: (852) 2619 8817  
Email: rgt@rec-eng.com

WhatsApp: (852) 9238 0703  
Website: www.rec-gt.com

CET Electric Technology Inc.

E: [sales@cet-global.com](mailto:sales@cet-global.com)

W: [www.cet-global.com](http://www.cet-global.com)

Revision Date: October 17, 2019

*Designed For Reliability*

*Manufactured To Last*