



CONTACT US 聯絡我們

(852) 9238 0703
rgt@rec-eng.com
www.rec-gt.com



Main Features 特點


- **Suitable for Different Scenario**, e.g. :
 - Plant Room
 - Server Room
 - Lift Shaft
 - Washroom
- **Various Protocol Option**
 - Narrowband (NB)
 - 4G Network
 - LoRa
 - Wi-Fi
- **Customized Online Platform**
 - Historical Data Report
 - Real Time Monitoring
 - Alert Notifications
 - WhatsApp
 - SMS
 - Email
 - Auto Dailer

Water Leakage Detection Set



Standalone Battery Type Water Leakage Detector

Operation Principle 運作原理

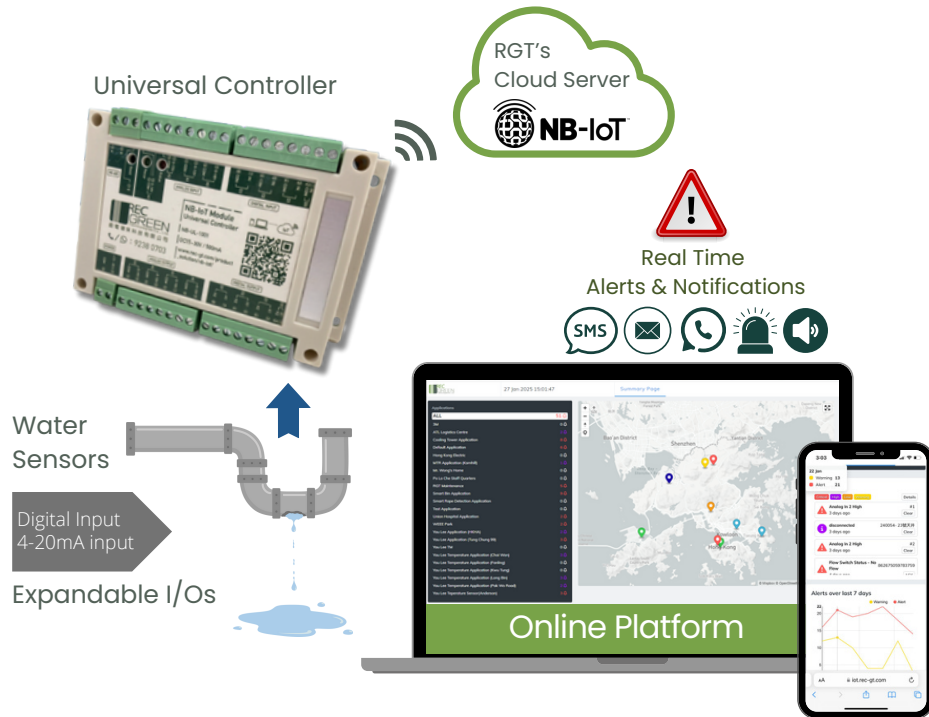

Specifications 規格

	Universal IoT Controller	Battery-typed Detector
IoT Protocol	NB-IoT / 4G / Wi-Fi	NB-IoT / LoRa
Dimension (L x D x H)	150mm x 90mm x 40mm	112mm x 70mm x 40mm
Mounting	Wall Mounted	Wall Mounted
Working Voltage	DC 15-30V / 500mA	DC 3.6V
Battery Life	N/A	Up to 5 Years
Working Environment	Temperature : -10°C-65°C Humidity : ≤95% RH	Temperature : -20°C-70°C Humidity : ≤95% RH
IP Rating	Depends on the Enclosure	IP67
Alarm Method	Sound (≥85dB), Light & Message to Server	Message to Server

Cloud Server 雲端輸出

(URL : iot.rec-gt.com)

Data Output :-

- Water Leakage Alarm
- Fault Signal
- Event Log
- Low Battery Alarm (For Battery Type)

Job Reference 案例參考

